

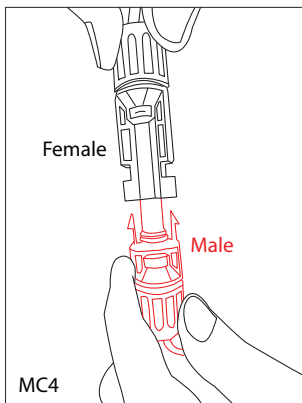


# Sunba Solar Battery Kit V3 - Quick Guide

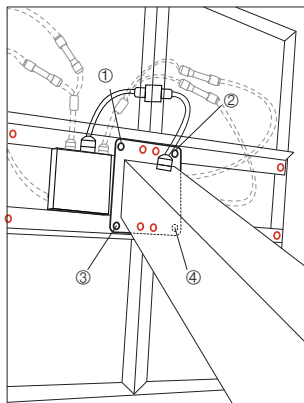

1. Connect the two solar panels facing downwards and secure them using two brackets and 4 screws with gaskets.
2. Fix the battery to the solar panel with 8 screws.
3. Secure the charge controller with four screws next to the battery.
4. Connect the charge controller and battery.
5. Connect the two pairs of MC4 cable (two male and two female in total).
6. Connect the two plugs on the charge controller to each of the two pairs of MC4 cables.


Fixing two solar panels first, then fix the battery and charge controller.

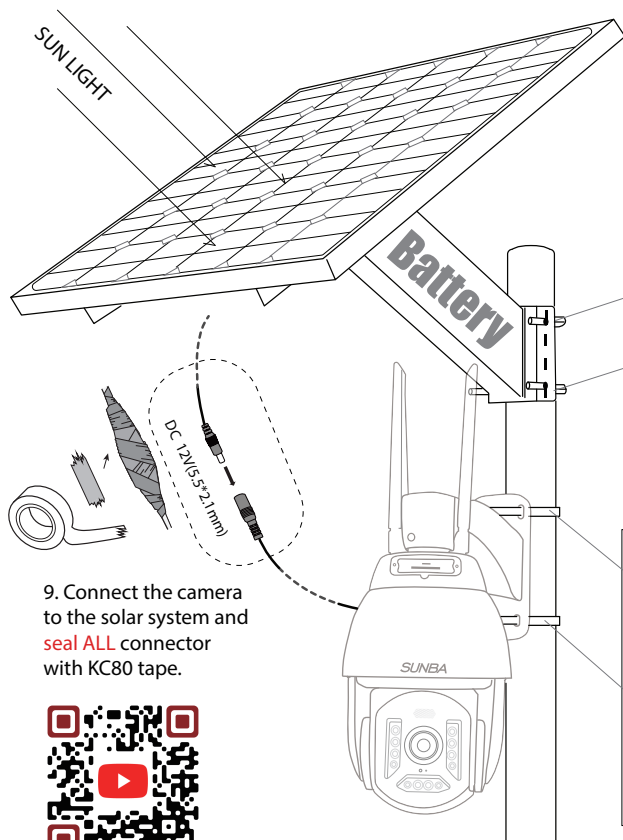


9. Connect the camera to the solar system and **seal ALL** connector with KC80 tape.



Scan to get Installation Video Tutorial:  
Support: [support@sunba.net](mailto:support@sunba.net)

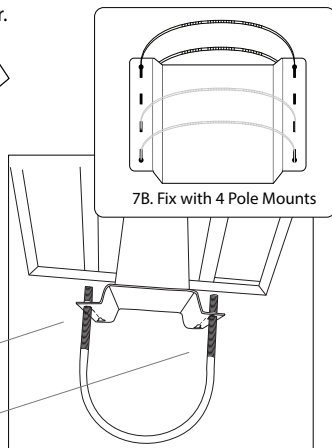

- 7A. Fix with 2 U-shaped Bolts  
Dual Mounting Options for the Solar Kit  
7A: 2 x U-Shape Bolts  
7B: 4 x Pole Mounts



8. Connect the camera to the pole

